


NMM-2



DIN 24960 (EN12756)

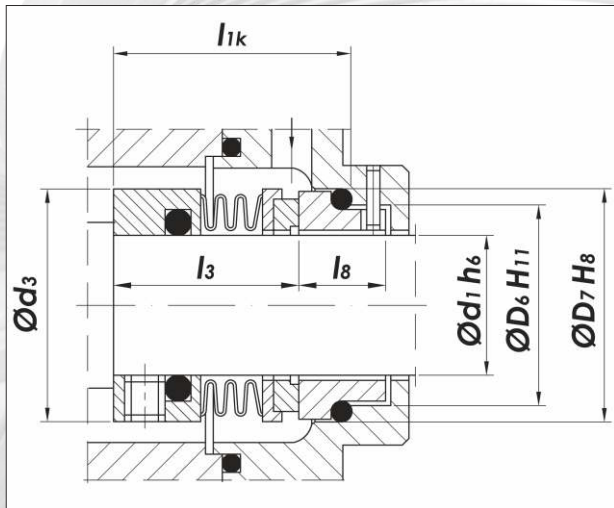

- p = 15
- t = -50 ... 220°C (NMM-1)
- t = -20 ... 350°C (NMM-G)
- v = 25 /

NMM-2/SC/



- (A,)
- (U3)
- (Q1, Q2)
- , FKM (V)
- (P)
- , EPDM (E)

| d ₁ | d ₃ | D ₆ | D ₇ | l _{1k} | l ₃ | l ₈ |
|----------------|----------------|----------------|----------------|-----------------|----------------|----------------|
| 20 | 34 | 29 | 35 | 37.5 | 30.5 | 15.0 |
| 22 | 36 | 31 | 37 | 37.5 | 30.5 | 15.0 |
| 24 | 39 | 33 | 39 | 40.0 | 33.0 | 15.0 |
| 25 | 39 | 34 | 40 | 40.0 | 33.0 | 15.0 |
| 28 | 42 | 37 | 43 | 42.5 | 35.5 | 15.0 |
| 30 | 44 | 39 | 45 | 42.5 | 35.5 | 15.0 |
| 32 | 46 | 42 | 48 | 42.5 | 35.5 | 15.0 |
| 33 | 47 | 42 | 48 | 42.5 | 35.5 | 15.0 |
| 35 | 49 | 44 | 50 | 42.5 | 35.5 | 15.0 |
| 38 | 54 | 49 | 56 | 45.0 | 37.0 | 16.0 |
| 40 | 56 | 51 | 58 | 45.0 | 37.0 | 16.0 |
| 43 | 59 | 54 | 61 | 45.0 | 37.0 | 16.0 |
| 45 | 61 | 56 | 63 | 45.0 | 37.0 | 16.0 |
| 48 | 64 | 59 | 66 | 45.0 | 37.0 | 16.0 |
| 50 | 66 | 62 | 70 | 47.5 | 38.0 | 17.0 |
| 53 | 69 | 65 | 73 | 47.5 | 38.0 | 17.0 |
| 55 | 71 | 67 | 75 | 47.5 | 38.0 | 17.0 |
| 58 | 78 | 70 | 78 | 52.5 | 42.0 | 18.0 |
| 60 | 80 | 72 | 80 | 52.5 | 42.0 | 18.0 |
| 63 | 83 | 75 | 83 | 52.5 | 42.0 | 18.0 |
| 65 | 85 | 77 | 85 | 52.5 | 42.0 | 18.0 |
| 68 | 87 | 81 | 90 | 52.5 | 41.5 | 18.5 |
| 70 | 90 | 83 | 92 | 60.0 | 48.5 | 19.0 |
| 75 | 99 | 88 | 97 | 60.0 | 48.5 | 19.0 |
| 80 | 104 | 95 | 105 | 60.0 | 48.5 | 19.0 |
| 85 | 109 | 100 | 110 | 60.0 | 48.5 | 19.0 |
| 90 | 114 | 105 | 115 | 65.0 | 52.0 | 20.5 |
| 95 | 119 | 110 | 120 | 65.0 | 52.0 | 20.5 |
| 100 | 124 | 115 | 125 | 65.0 | 52.0 | 20.5 |

+