

# BT-1

DIN 24960


(EN12756) DIN 24960



- p=25
- t= -20... 180 °C
- v= 15 /

±1

( )  
(A)  
( )  
(U<sub>3</sub>)  
(Q<sub>1</sub>, Q<sub>2</sub>)  
Al<sub>2</sub>O<sub>3</sub> (V)

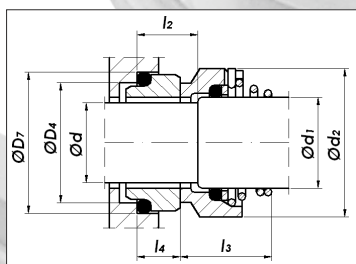

d	d <sub>1</sub>	d <sub>2</sub>	D <sub>4</sub>	D <sub>7</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>
10	14	24	17	21	18	26	10
12	16	26	19	23	18	27	10
14	18	31	21	25	18	30	10
16	20	34	23	27	18	32	10
18	22	36	27	33	20	33	11
20	24	38	29	35	20	33	11
22	26	40	31	37	20	33	11
24	28	42	33	39	20	33	11
25	30	44	34	40	20	34	11
28	33	47	37	43	20	36	11
30	35	49	39	45	20	36	11
32	38	54	42	48	20	40	11
33	38	54	42	48	20	40	11
35	40	56	44	50	20	44	11
38	43	59	49	56	23	47	11.5
40	45	61	51	58	23	48	11.5
43	48	64	54	61	23	50	11.5
45	50	66	56	63	23	53	11.5
48	53	69	59	66	23	53	11.5
50	55	71	62	70	25	58	12
53	58	78	65	73	25	58	14
55	60	80	67	75	25	60	14
58	63	83	70	78	25	60	14
60	65	85	72	80	25	60	14

BT-1.1

BT-1.2

BT-1.3